

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

**⚠ IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.**

### 1. SAFETY INSTRUCTIONS

- ✓ Always load evenly with the centre of gravity of the load as near the centre and rear of the plate as possible.
- ✓ Obtain additional support for large or wide loads to prevent tipping.
- ✗ Do not overload the truck - see Specification.
- ✗ Do not leave unattended, especially when loaded, unless the wheels are chocked or the truck is otherwise secured.
- ✗ Do not use truck on uneven ground and do not run over curbs or steps - use a ramp.
- ✗ Do not allow others to ride on the truck.
- ✗ Do not use the truck if any part is damaged, paying particular attention to the wheels.


### 2. SPECIFICATION

Extra strong tubular steel frame construction. Steel centred pneumatic wheels allow transport over the roughest terrain. Include rubber handgrips. Additionally CST990 features extra foldaway toe plate (fig.2) for added extension when transporting larger loads. Ideal for delivery drivers, farmers or builders.

<b>Model No.</b> .....	<b>CST990.V3</b>
Max. Load .....	250kg
Wheel Diameter .....	260mm
Wheel Thickness .....	90mm
Height .....	1249mm
Overall Width .....	650mm
Platform Depth .....	325/620mm

### 3. ASSEMBLY

- 3.1 **Wheels.** Ensure each axle is clean from dust and dirt to allow free movement of the wheel. On CST990 you will need to slide the axle through the frame bushes first.
- 3.2 Slide the wheel (1.2) onto the axle (1.1), followed by the washer (1.3) and complete by pushing the split pin (1.4) through the hole in the end of the axle and bending over to retain.
- 3.3 Repeat for the other side.

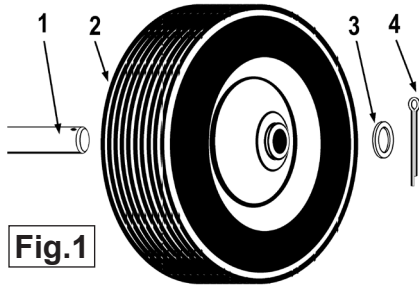

**Fig.1**



**Fig.2**

Parts support is available for this product. To obtain a parts listing and/or diagram, please log on to [www.sealey.co.uk](http://www.sealey.co.uk), email [sales@sealey.co.uk](mailto:sales@sealey.co.uk) or phone 01284 757500.

**NOTE:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

**IMPORTANT:** No liability is accepted for incorrect use of product.

**WARRANTY:** Guarantee is 12 months from purchase date, proof of which will be required for any claim.

**INFORMATION:** For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.