

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

⚠ IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS, AND CAUTIONS. USE THIS PRODUCT CORRECTLY, AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY.

1. SAFETY INSTRUCTIONS

- ✓ Familiarise yourself with the application and limitations of the hose reel, as well as the specific hazards.
- ❑ **WARNING!** Disconnect the hose reel from the water supply before changing accessories, servicing or performing any maintenance.
- ✓ Maintain the hose reel in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. *Use recommended parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ✓ Locate and fix the hose reel in a suitable working area. Do not position the hose in direct sunlight, or in areas of extreme heat or cold. Ensure there is adequate lighting.
- ❑ **WARNING!** Ensure maximum pressure is not exceeded.
- ✓ Keep extended hose away from heat, oil and sharp edges. Check hose for wear before each use, and ensure all connections are secure.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings, and other loose jewellery and contain and/or tie back long hair.
- ✓ Keep children and unauthorised persons away from the working area.
- x **DO NOT** operate the hose reel if any parts are damaged or missing as this may cause failure and/or personal injury.
- x **DO NOT** exceed the rated capacity of the hose reel.
- x **DO NOT** use the hose reel for any purpose other than that for which it is designed.
- x **DO NOT** yank the hose from the water supply.
- x **DO NOT** operate the hose reel when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- x **DO NOT** direct water from the water hose at yourself or others.
- ✓ When not in use ensure the water supply is turned off and tools disconnected. Disconnect from the water supply and retract the hose.


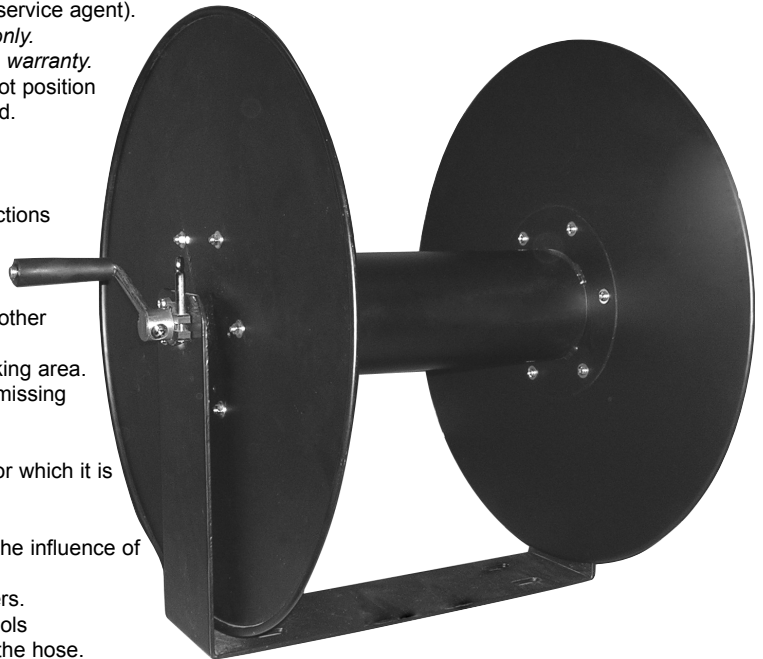


Fig 1

2. INTRODUCTION & SPECIFICATION

Heavy-duty steel open style construction with mounting bracket for fixing to wall or floor. Suitable for industrial applications or areas where longer length of hose is required. Will hold up to 80mtr (260ft) of Ø13mm hose. Screw operated drum lock.

Hose Capacity (not supplied): .80mtr x Ø13mm
 Inlet/Outlet:13mm(1/2")
 Max Pressure:300psi (20bar)
 Weight (Excluding Hose):10kg

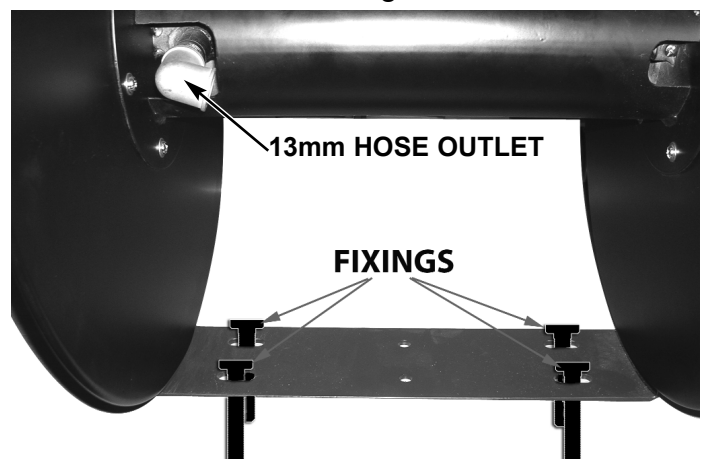

3. MOUNTING/ASSEMBLY

NOTE! Fit reel to wall before fitting hose to reel.

- 3.1 Fix the reel in an appropriate position ensuring that the wall and the mounting screws and plugs (not supplied) will adequately support the weight of the reel and the tension of the hose as it is pulled from the reel.
- 3.2 Ensure that the hose reel is located so that the hose can be operated without causing unnecessary sideways force.
- 3.3 It is recommended that two people fit the reel to the chosen surface, one to support the weight and the second to secure the reel using the bolt holes (Fig 1). Four sturdy masonry bolts are suitable for securing the hose reel, providing they give ample support during the unreeling/reeling of the hose.
- 3.4 Attach the hose to the 13mm (1/2") fitting (Fig 1) and wind it onto the reel taking care to guide the hose from one side of the reel to the other to prevent bunching of the hose.
- 3.5 Attach the supply hose to the 13mm (1/2") external fitting.

4. OPERATION

4.1 ADJUSTING THE BRAKE SCREW (Fig 2)

- 4.1.1 To lock the reel, turn the brake screw fully clockwise.
To unlock the reel turn the brake screw anticlockwise.


4.2 EXTENDING THE HOSE

- 4.2.1 Adjust the brake screw so that it is not locked but places slight tension on the reel. This will prevent the hose from running off the reel when you stop pulling the hose.

4.3. RETRACTING THE HOSE.

- 4.3.1 When retracting the hose, always make sure the water supply is turned off, make sure there is plenty of space to perform the task. Free the hose's path of any obstructions and check for kinks in the hose before reeling in.
- 4.3.2 Loosen the brake screw. Wind the hose in whilst guiding it evenly from one side of the reel to the other to prevent the hose bunching on one side.
- 4.3.3 When the task is complete, tension the brake screw to prevent the stored hose unravelling.
- 4.3.4 Pull the handle and turn through 90° to store the handle safely.

Fig 2

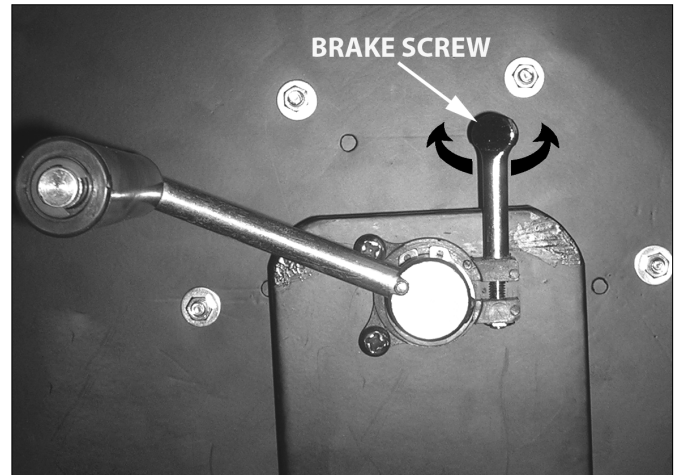


5. MAINTENANCE & STORAGE

To ensure reliable operation, clean the hose and reel regularly using a cloth and warm water.

STORAGE:

Should you wish to store the hose and reel, ensure it is clean and dry. Place in a dark, safe, dry, childproof location, where the temperature will remain reasonably stable.

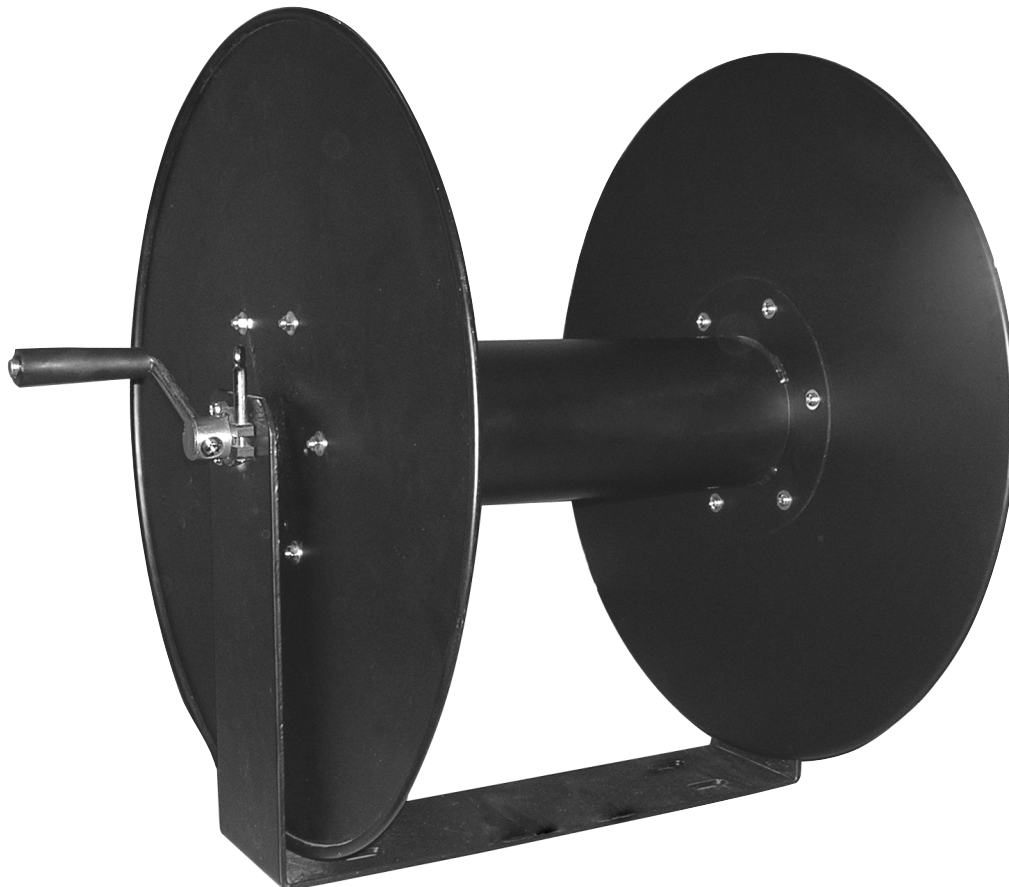



NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. **IMPORTANT:** No liability is accepted for incorrect use of this product.



WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our catalogue and latest promotions call us on 01284 757525 and leave your full name, address and postcode.



Sole UK Distributor
Sealey Group,
Bury St. Edmunds, Suffolk.

 01284 757500
 01284 703534

 www.sealey.co.uk
 sales@sealey.co.uk