

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will, if used according to these instructions and properly maintained, give you years of trouble free performance.

! IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE KEEP INSTRUCTIONS SAFE FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- ✓ Keep the drain tube and bottle clean and maintain it in good condition.
- ✓ Replace or repair damaged parts. *Use genuine parts only. Unauthorised parts may be dangerous and will invalidate the warranty.*
- ✓ Keep all non-essential persons away from the work area.
- ✓ Check connections and fittings before use.
- ✓ Ensure that the bottle capacity exceeds the amount of fluid to be collected.
- ✗ **DO NOT** use for any purpose other than that for which it is designed.
- ✗ **DO NOT** operate if any parts are damaged or missing as this may cause failure and/or personal injury.
- ✗ **DO NOT** leave drain tube and bottle operating unattended.
- ✓ **IMPORTANT!** *Ensure that you wear protective clothing, gloves, goggles, face mask as appropriate for the fluid being extracted.*
- ☐ **WARNING!** *DO NOT allow uncontrolled discharge of fluids thus polluting the environment.*
- ✓ Dispose of waste fluids in accordance with local authority regulations.
- ☐ **WARNING!** *DO NOT use with gasoline or other flammable liquids.*
- ✗ **DO NOT** use the unit to extract dangerous chemicals, poisons, acids, alkaline's or solvents.
- ✗ The container is not designed for long term storage.
- ✗ **DO NOT** store the unit under extreme conditions.
- ✗ **DO NOT** adapt the unit for any other purpose.
- ✓ When not in use, store in a safe, dry, childproof area.

2. SPECIFICATION

VS7010

- Designed to attach to the oil filter housing on VAG FSI petrol engines.
- Allows the filter housing to be drained before removal, preventing spillage.
- Use in conjunction with a suitable oil drainer.


VS7110

- Designed to attach to the oil filter housing on VAG FSI petrol engines.
- Allows the filter housing to be drained before removal preventing spillage.
- Features a control valve fitted to the bottle and hanging chain.

3. OPERATING INSTRUCTIONS

- 3.1 With the vehicle on a suitable ramp drain engine oil.
- 3.2 Locate the oil filter (black plastic housing).
- 3.3 Remove the duct cover on the bottom of the housing to expose the red bleed valve.
- 3.4 **VS7110** - Secure drain bottle using the retaining chain and open valve, on top of the drain bottle.
- 3.5 Screw the adaptor into the end of the plastic housing. Screwing in the adaptor will release the red bleed valve in the filter housing which allows the oil to drain.
- 3.6 Once fully drained unscrew adaptor.
- 3.7 The filter housing can now be removed from the engine using the large hex located at the bottom of the filter housing.

Keep the unit clean, wipe off any fluid spillage. Keep the tubes clean and clear of blockages. Check that all tubes and connections are in good condition.

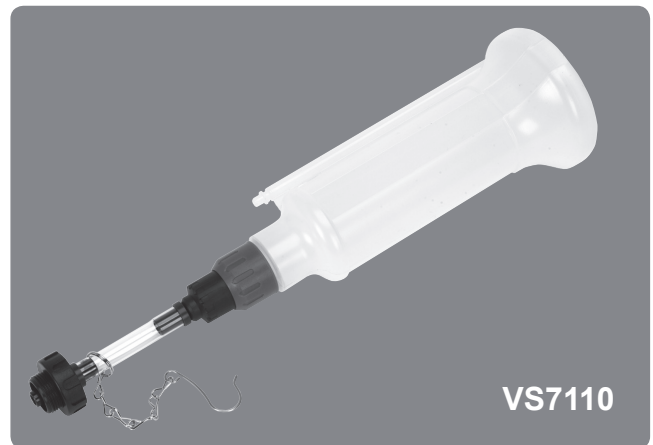

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of this product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: For a copy of our latest catalogue and promotions call us on 01284 757525 and leave your full name and address, including postcode.